



Technical Information

Assessment Data

Performance: Endurance tested to 100,000 operations

Corrosion Resistance: Meets requirements of BS EN 1670:2007 (Grade 4, 240 Hours)

Material Specifications

All Steel Components:

Steel C1008, Trivalent silver finish

Centre Latch, Deadbolt & Rollers:

Brass, nickel plated

Additional Information


8 Profile related packers for deadbolt keeps

- Trivalent Silver finish
- Reversible centre latch to suit all applications
- Latch can be changed from the faceplate without removing unit from the profile
- Suitable for lever-lever and offset lever-pad or offset lever/lever applications
- Two roller cams for effortless operation
- Can be fitted with shootbolts
- Two opposing hooks, centre deadbolt and shootbolt options for enhanced security

	CODE	DESCRIPTION
MAIN PARTS	DLPN352H2RT	35MM BACKSET DOORBOLT
	DKPN352H2RLT	FULL LENGTH KEEP (L. HAND)
	DKPN352H2RRT	FULL LENGTH KEEP (R. HAND)
	DKCLDLT	CENTRE LATCH KEEP (L. HAND)
	DKCLDRT	CENTRE LATCH KEEP (R. HAND)
	DKHRT	HOOK BOLT/ROLLER KEEP
	DKHDT	HOOK KEEP
OPTIONAL	MBCSS	MULTI BOLT RETAINING CLIP
	DKFDKSS	DOUBLE FRENCH DOOR KEEP
	DKSKLSS	SINGLE RESI DOOR KEEP (L. HAND)
	DKSKRSS	SINGLE RESI DOOR KEEP (R. HAND)
	DASSB80SS	80MM SHORT THROW SHOOTBOLT S/STEEL
	DALSB80SS	80MM LONG THROW SHOOTBOLT S/STEEL
	DASSB160SS	160MM SHORT THROW SHOOTBOLT S/STEEL
	DALSB160SS	160MM LONG THROW SHOOTBOLT S/STEEL
	DASSB260SS	260MM SHORT THROW SHOOTBOLT S/STEEL
	DALSB260SS	260MM LONG THROW SHOOTBOLT S/STEEL
	ADBESS	DOOR BOLT EXTENSION C/W CAM
ADBESSO	DOOR BOLT EXTENSION NO CAM	

The Trivalent 2 Hook, 2 Roller door lock is available with a comprehensive range of ancilliary items to suit a wide range of applications.

ROUTING GUIDE

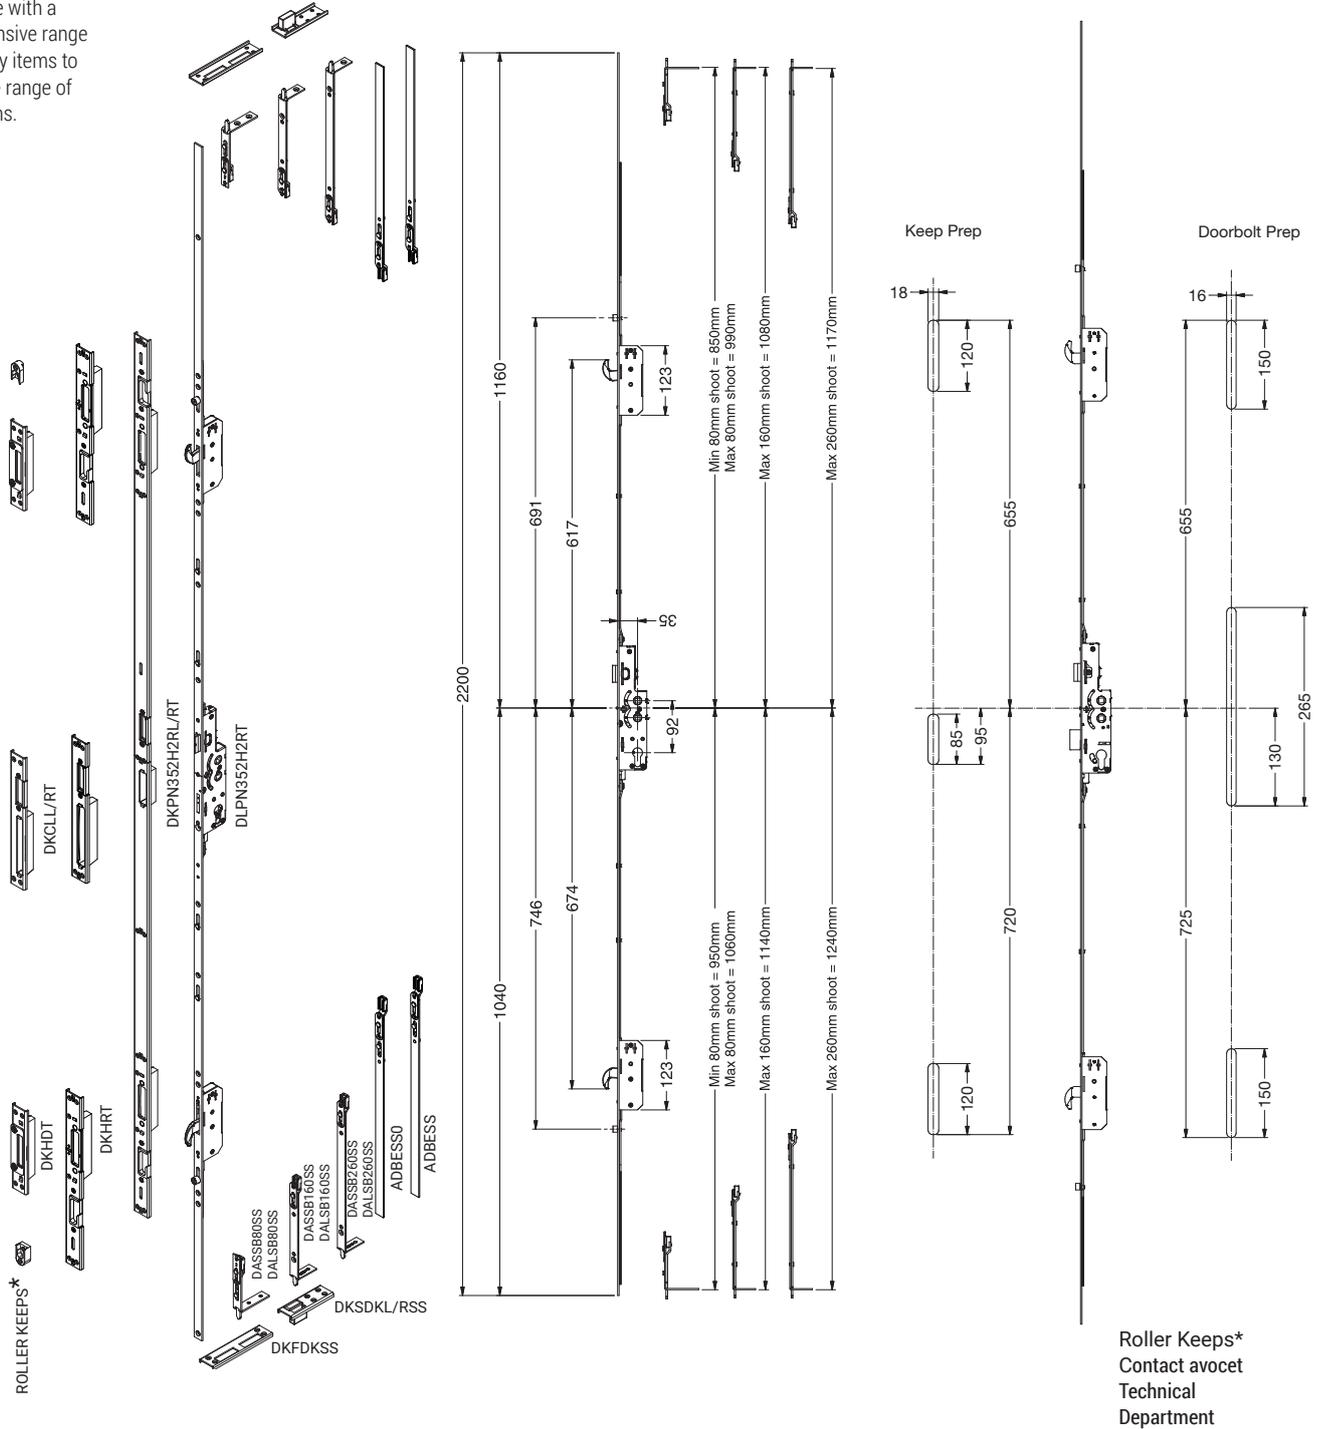

Roller Keeps*
Contact avocet
Technical
Department

TYPE	BACKSET	ROLLER CAMS	DEAD BOLT	HOOKS	SHOOTBOLT (OPTIONAL)	SASH LIFTER	KEEP ACCESSORIES		
							1 PIECE	3 PIECE	5 PIECE
TRIVALENT - 2 HOOK, 2 ROLLER	35	2	1	2	2	0	✓	✓	✓